

# FINE FISSURED AND FINE FISSURED PLANK




FINE FISSURED Square Edge with PeakForm™ Prelude™ XL 24mm Exposed Tee grid

## BENEFITS

- TOTAL ACOUSTICS™ Performance (NRC+CAC)
  - High sound absorption for reduced reverberation and quieter spaces
  - High sound attenuation, improving room to room privacy
- Cost effective ceiling solution
- Reliable, proven performance
- High light reflective finish
- RH99 Humidity Resistant
- Sustainable – Green Star® contribution

## APPLICATION AREAS

- Offices
- Education
- Healthcare
- Corridors
- Libraries

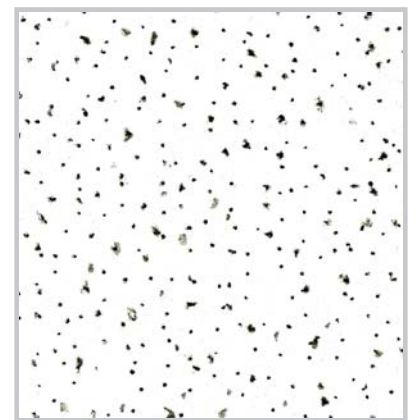

Inspiring Great Spaces®

**Armstrong**®  
CEILING SOLUTIONS

# FINE FISSURED AND FINE FISSURED PLANK



RH99  
Humidity  
Resistant



Up to  
56%  
Recycled Content  
EN ISO 14021



85%  
Light Reflectance



Acoustical  
Comfort



TOTAL  
ACOUSTICS™

Panel Options	SQUARE LAY-IN	ANGLED TEGULAR	BEVELLED TEGULAR		K2C2 EDGE
	 Prelude™ 24mm Grid	 Prelude 24mm Grid	 Suprafine™ 15mm Grid	 Silhouette™ 15mm Grid	 One Way / Modular Grid
<b>Fine Fissured</b>					
48 x 24 x 5/8in	1730	*	*		–
600 x 600 x 15mm	3510	3572	3577		–
1200 x 600 x 15mm	3570	3574	*		*
<b>Fine Fissured Plank</b>					
1200 x 400 x 19mm	4830	4833	*		4844
1350 x 450 x 19mm	4831	4834	*		4845
1500 x 500 x 19mm	4832	4835	*		4846

\* Special item on request. Other sizes and profiles, including Fine Fissured High Acoustic K2C2 edge for semi-concealed grid systems upon request.

– Not available

# BioBlock not available on item 3570ATV

Contact your local Armstrong Ceilings representative for stock availability



NRC: 0.60 (Fine Fissured)  
0.70 (Fine Fissured High Acoustic)



CAC: 33 (Fine Fissured Square Lay In)  
35 (Fine Fissured Tegular and K2C2 Edge)



RH99% at 0°C – 49°C



Conforms with BCA Spec. C1.10 and tested to AS/NZS 3837:1998  
– Group 1, ISO 5660 – Group 1 –S



Thermal Insulation (R- Value)  
0.26 m<sup>2</sup>/K/W (Fine Fissured)  
0.40 m<sup>2</sup>/K/W (Fine Fissured High Acoustic)



3 kg/m<sup>2</sup> (items: 1730,3510, 3570-3574)  
5.37 kg/m<sup>2</sup> (items 4830-4846)

## Material

Wet-formed mineral fibre

## Surface Finish

Factory-applied vinyl latex paint with painted BioBlock™ mould/mildew inhibitor#

## Backloading Recommendation

Contact your local Armstrong Ceilings representative

## Recycled Content

26% for items: 1730,3510, 3570-3574

43% for items: 4830-4846

51% for Items 3510ATV and 3570ATV

## Suspension Systems

PeakForm™ Steel options above, with ARMSTRONG BLUE TONGUE® Aluminium upon request

## Green Star: Potential contribution

MAN		IEQ			ENE	MAT and Mat. Calc.				
Waste Management	Daylight Factor	Noise Levels	Emissions	Energy	Modular & Design for Disassembly	Level A Certified Product	Product Stewardship	EMS to ISO 14001	Recycled Content	
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	



Armstrong World Industries Pty Ltd

www.armstrongceilings.com.au

Email: [scentre@armstrongceilings.com](mailto:scentre@armstrongceilings.com)

NSW/ACT

Tel: (02) 9748 1588

VIC/TAS

Tel: (03) 8706 4000

QLD/NT

Tel: (07) 3809 5565

Inspiring Great Spaces® is a trademark of AFI Licensing LLC; Green Building Council Australia logo is a trademark of the Green Building Council of Australia; Global GreenTag<sup>cert</sup>, Green Rate™ and trust brands™ are trademarks of Dual Harmony Pty Ltd; All other trademarks are property of AWI Licensing LLC and/or affiliates. © 2017 AWI Licensing LLC.

AWP1017 Printed on Zanders Mega Recycled paper

Inspiring Great Spaces®

**Armstrong®**  
CEILING SOLUTIONS